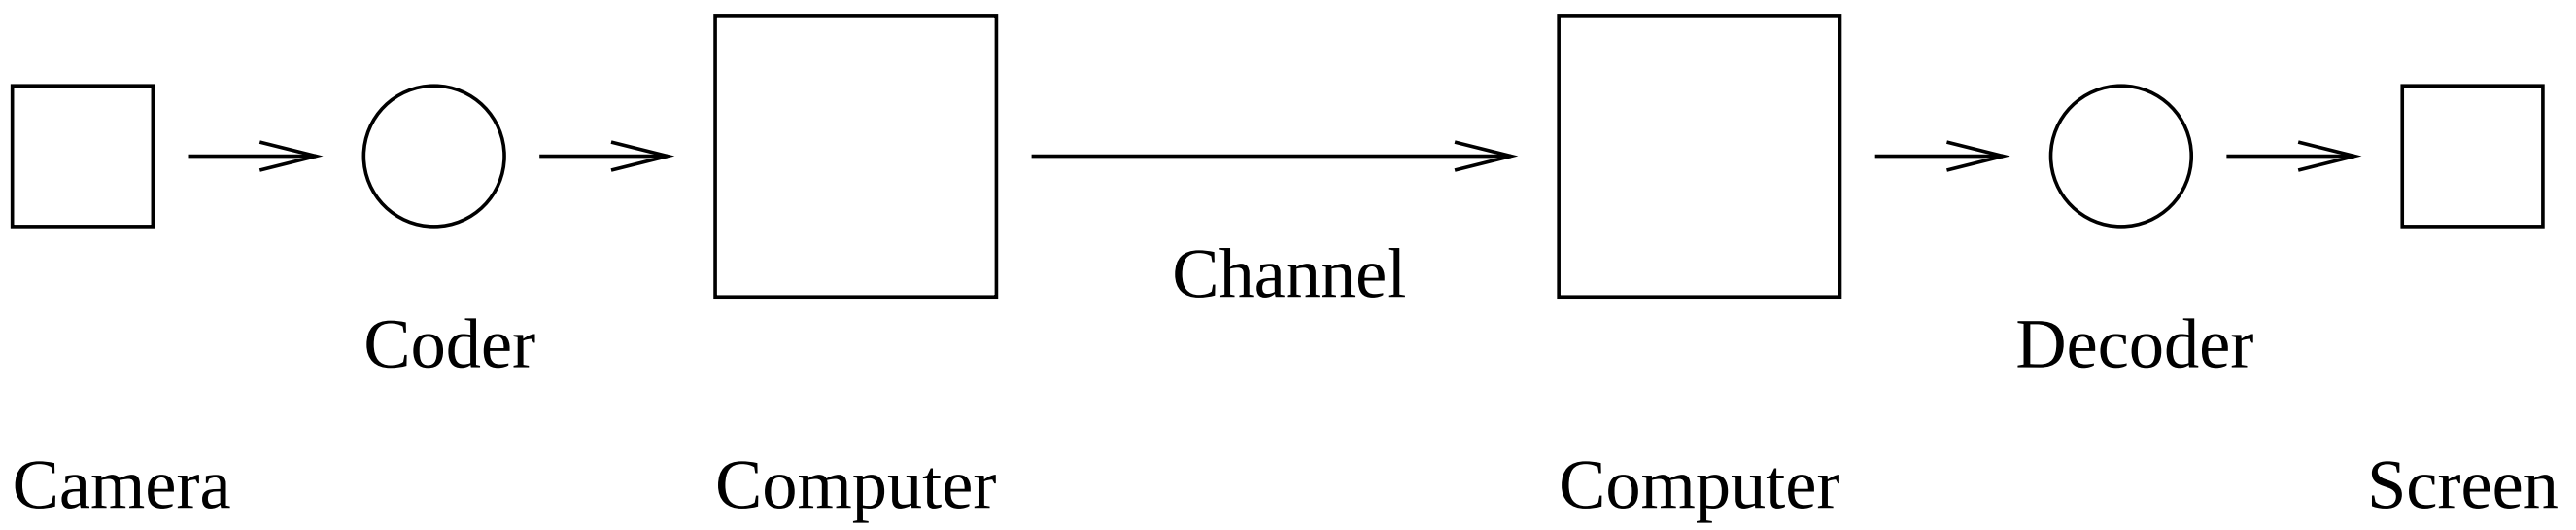

Overall video telephony set-up

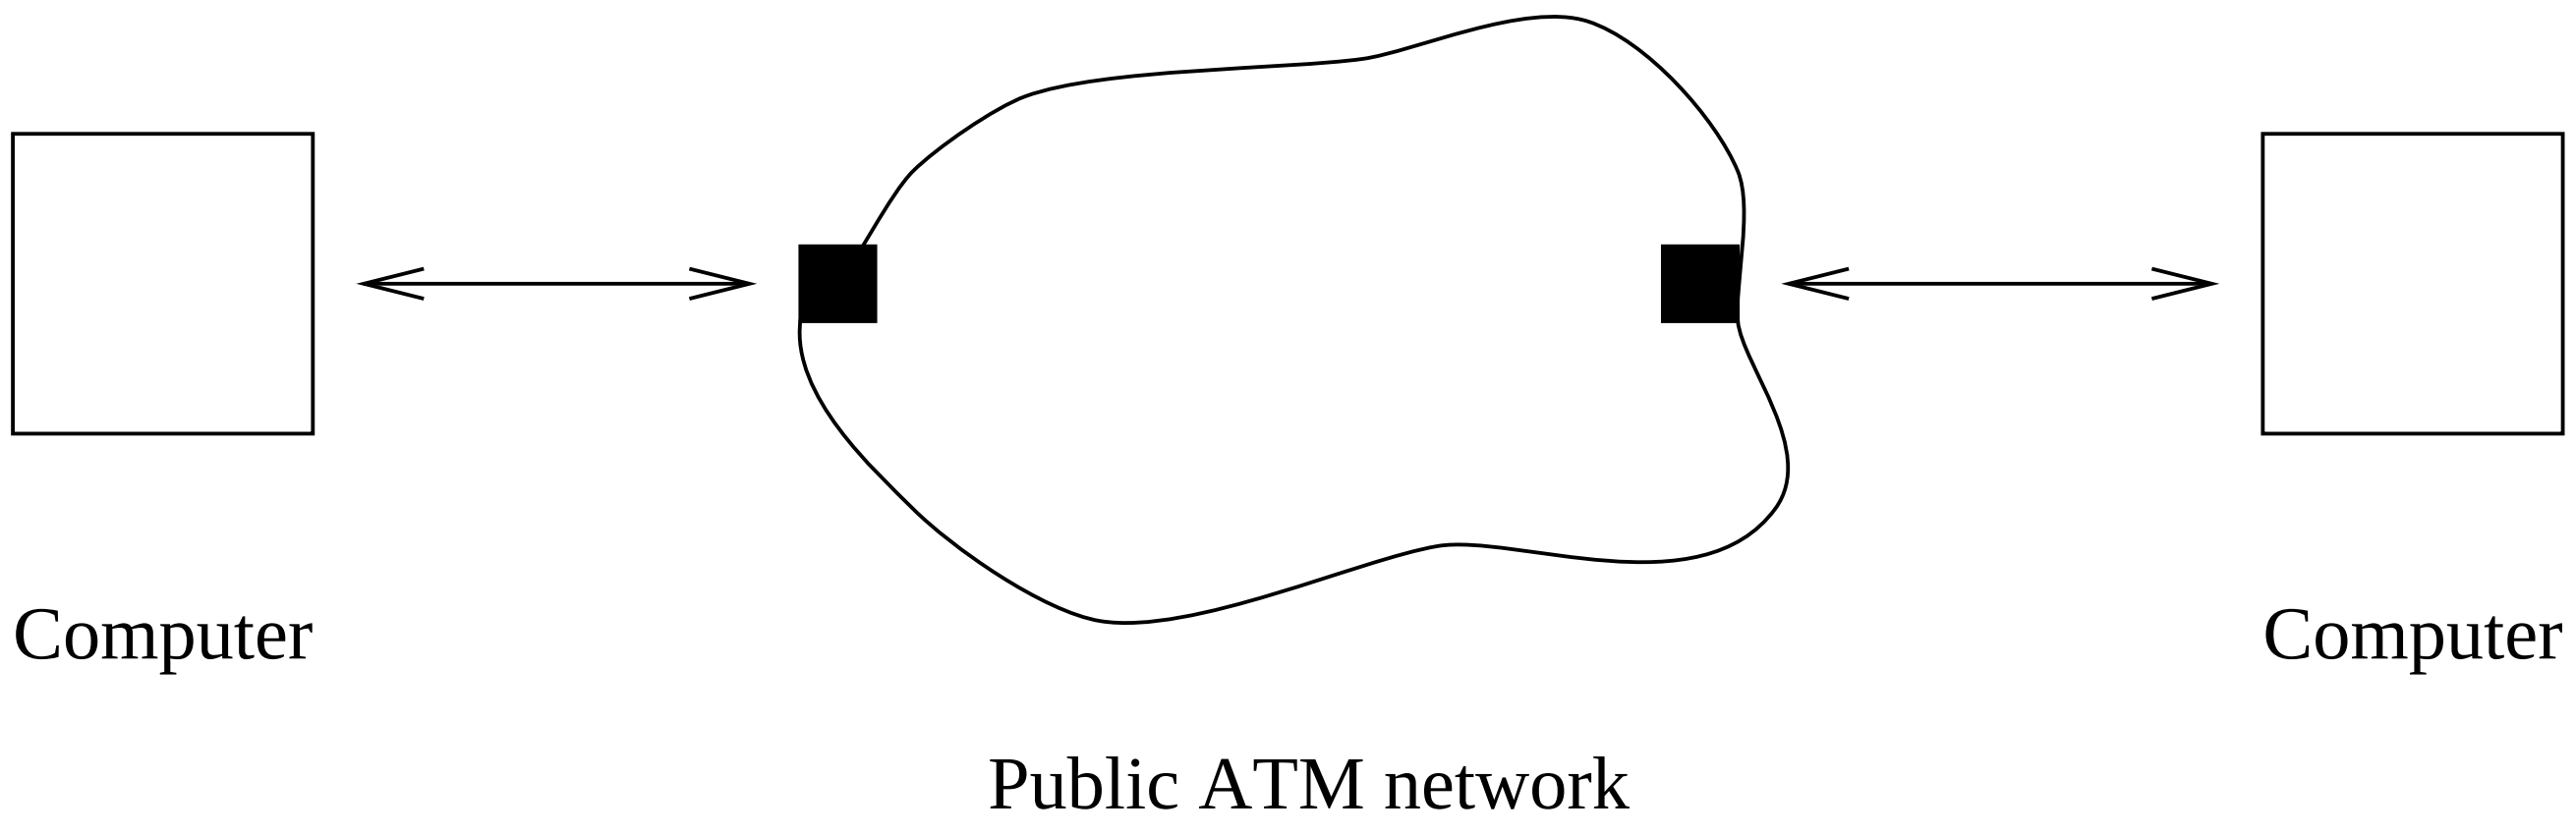

Implementation of video telephony channel

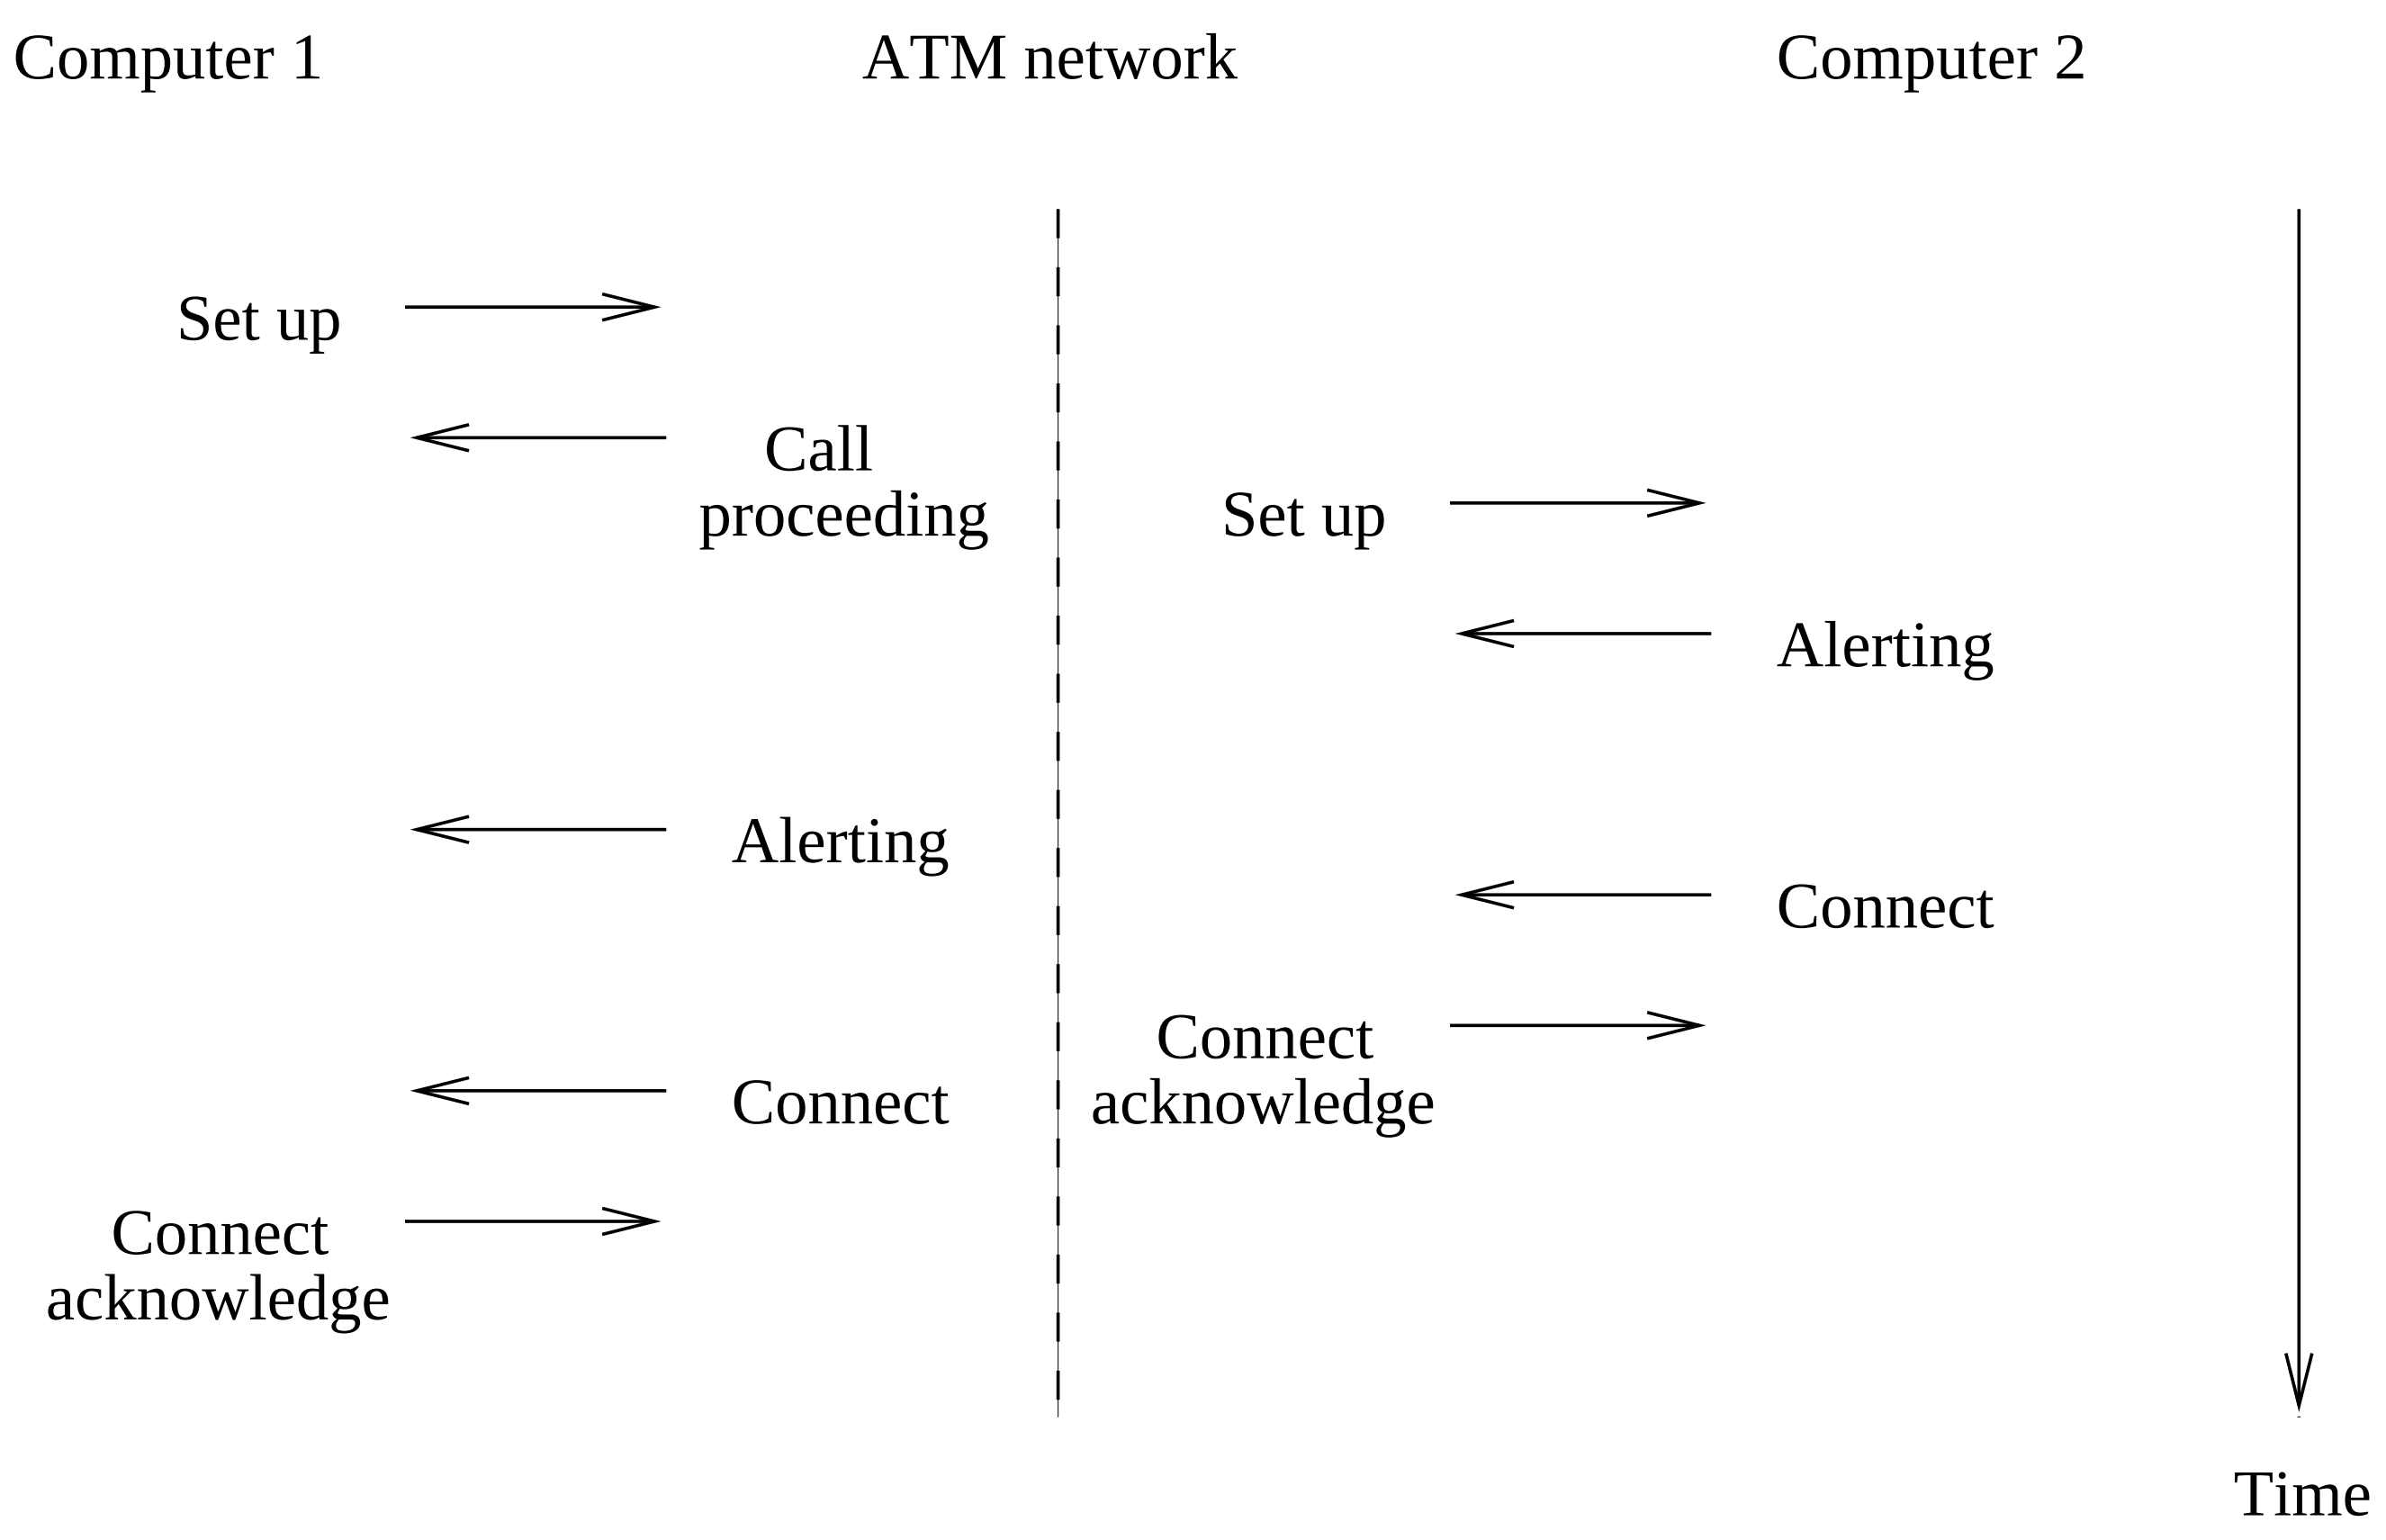

Establishment of connection using Q.2931

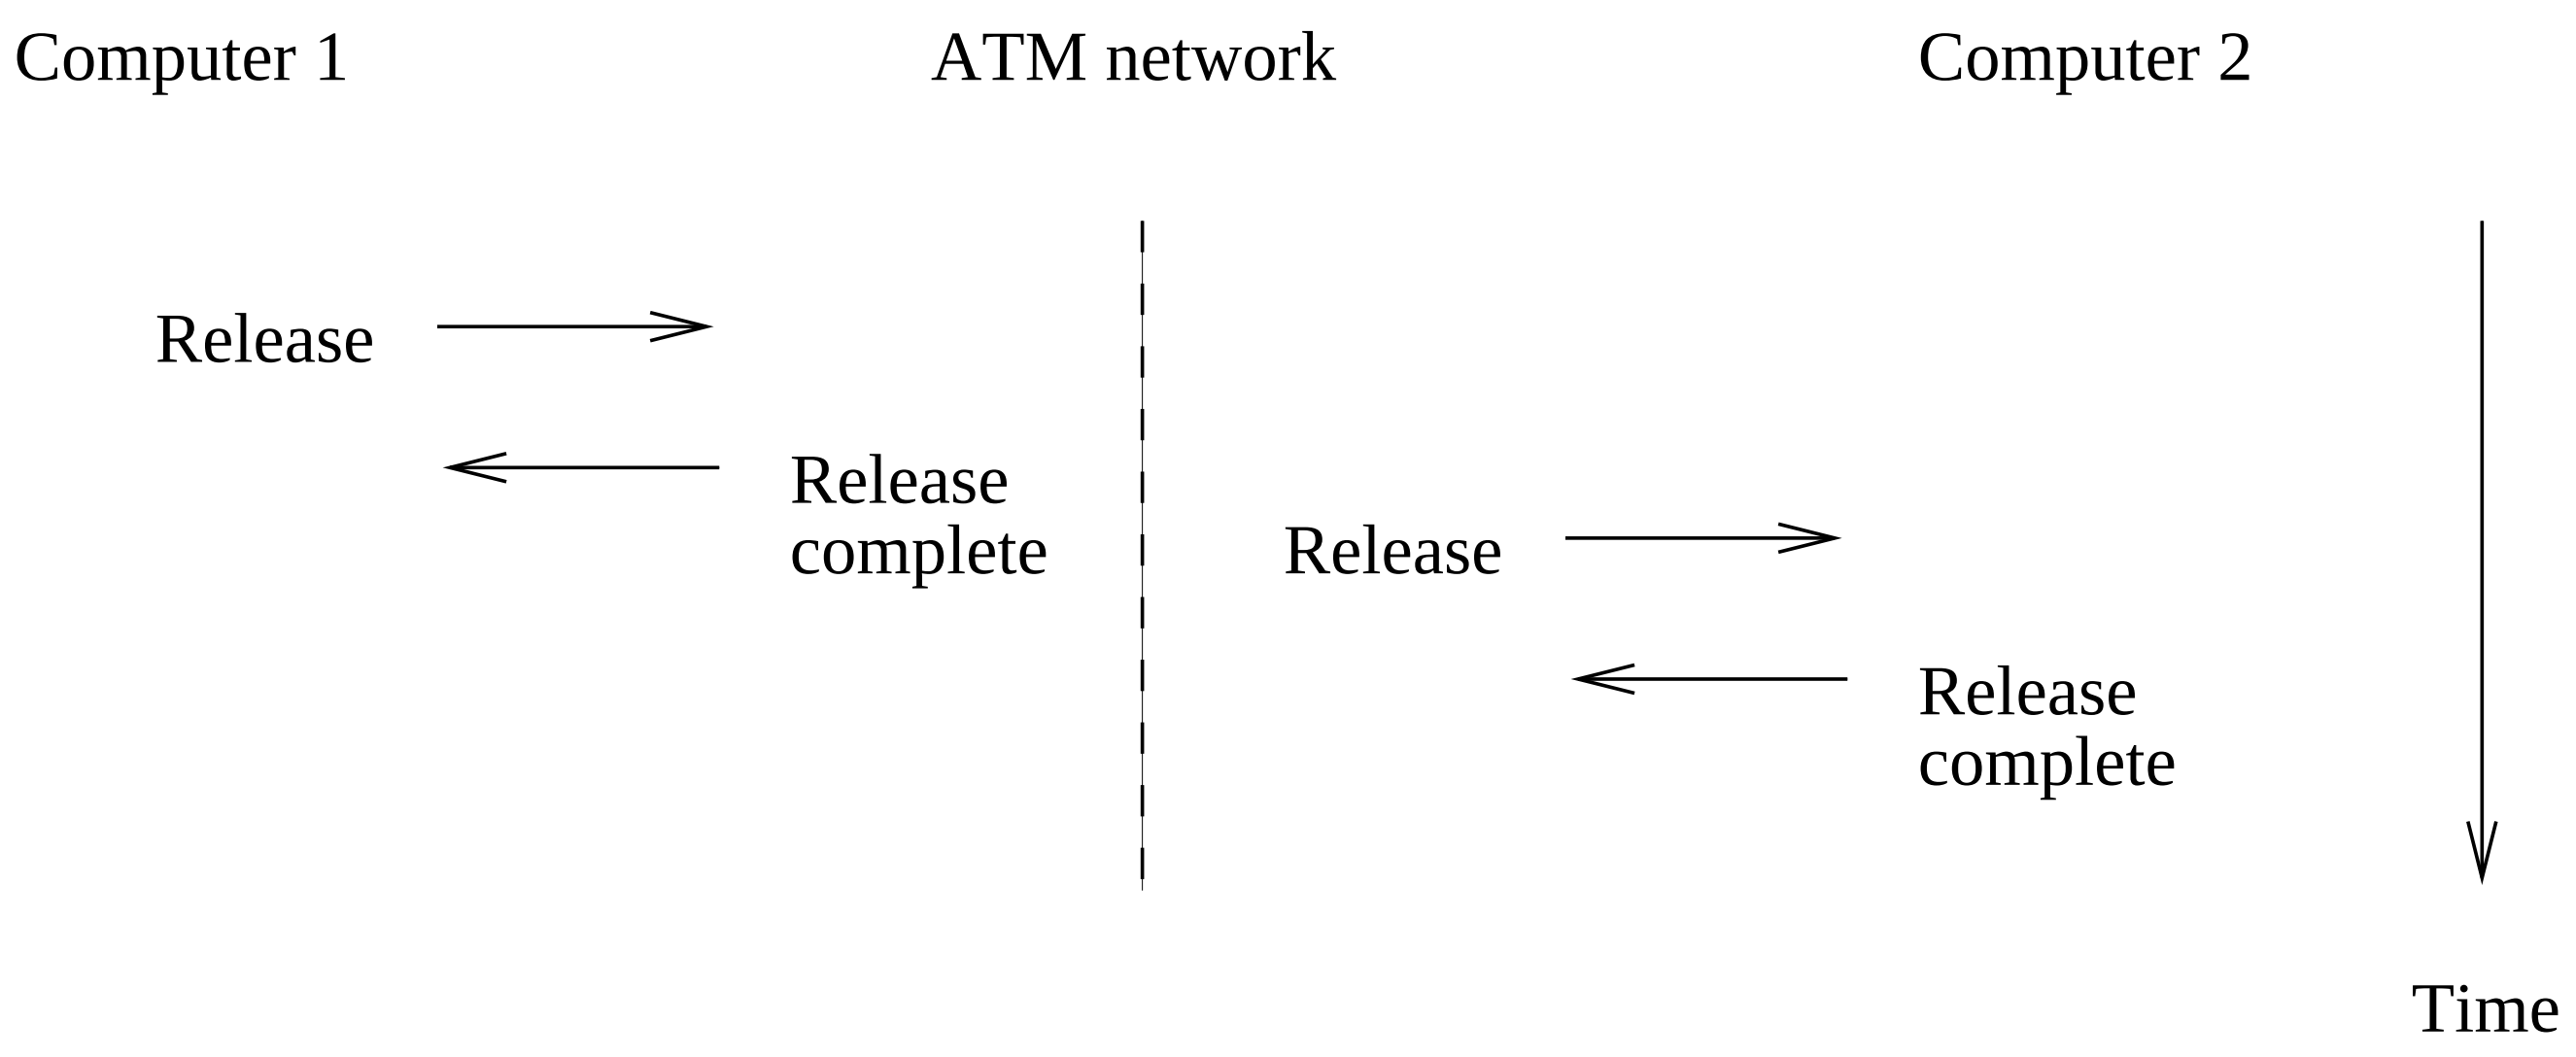

Termination of connection using Q.2931

User information	
User-to-user indication	1 byte
Common part indicator	1 byte
Message length	2 bytes
Cyclic redundancy code using CRC-32	4 bytes

Format of AAL5 message